


XL 70, 80 & 90 MDE: STANDARD FEATURES



SUSPENSION FEATURES

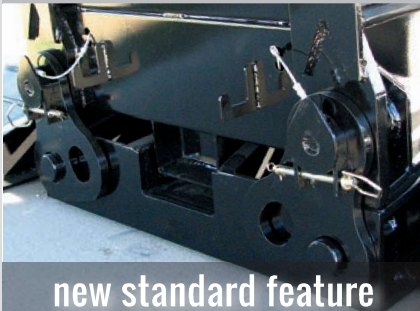

new standard feature

Manual ride height control and double donuts allow the main deck height to vary 1½" in the wheel area and 1½" at the neck.

ONE-PIECE EXTEND-A-TRAC



new standard feature

The patented Extend-a-trac now features a one-piece track pan design for added stability.

EXTENSION STOPS EVERY 2'



new standard feature

The Extend-a-trac has extension stops every 2' for added versatility.

TOOLBOX IN GOOSENECK WITH LIGHT



new standard feature

The lockable toolbox in the base of the gooseneck has an aluminum cover, a chain rack, and a light to find your items at night with ease.


REAR COUPLER USER-FRIENDLY DESIGN



new standard feature

The rear coupler uses an angled control panel, making it easier to reach all the needed controls: air, electric, and raise & lower valve.

XL 70, 80 & 90 MDE: STANDARD SPECS

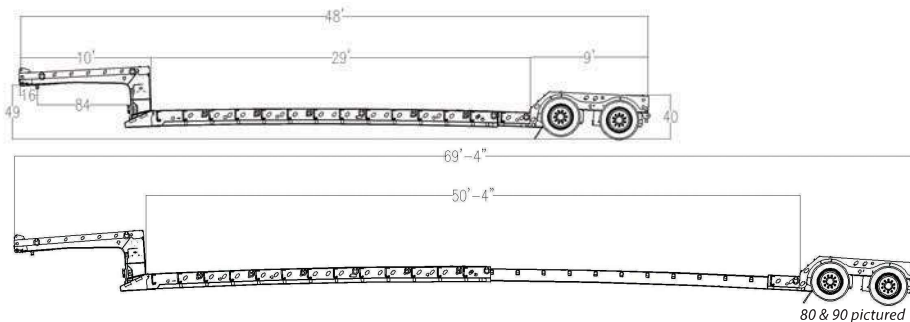

XL70 MDE

CAPACITY: 70,000 LB OVERALL CLOSED
 CONCENTRATED: 50,000 LB IN 10' CLOSED
 OAL: 48' | OAW: 102"

XL80 MDE

CAPACITY: 80,000 LB OVERALL CLOSED
 CONCENTRATED: 60,000 LB IN 10' CLOSED
 OAL: 48' | OAW: 102"

XL90 MDE

CAPACITY: 90,000 LB OVERALL CLOSED
 CONCENTRATED: 70,000 LB IN 10' CLOSED
 OAL: 48' | OAW: 102"

GOOSENECK

MECHANICAL DETACHABLE FULL-WIDTH
 10' LONG
 49" 5TH WHEEL HEIGHT
 84" SWING CLEARANCE
 16" KING PIN SETTING W/ 3/8" PLATE
 (2) BENT D-RINGS PER SIDE
 (2) PAN STYLE D-RINGS PER SIDE, ON
 CORNER
 1 1/8" APITONG DECKING FLUSH
 ALUMINUM MUDFLAPS
 DOUBLE DONUT FRONT
 CONNECTOR PLATE
 TOOLBOX IN BASE W/ LOCKABLE
 ALUMINUM LID, CHAIN RACK, LIGHT
 (2) FLAG HOLDERS
 80 & 90: BRACKETS FOR 36" FLIP NECK

GOOSENECK OPTIONS

PULL OUT LIGHTS
 1 PAIR CLEARANCE LIGHTS
 1 3/8" APITONG DECKING - RAISED
 REGISTRATION HOLDER
 36" FLIP NECK (FOR 80 & 90 ONLY)

REAR BRIDGE

54" AXLE SPACING: 9' LONG
 60" AXLE SPACING: 9' 6" LONG
 40" DECK HEIGHT
 1 1/8" APITONG DECKING FLUSH
 (2) FLAG HOLDERS
 (2) STAKE POCKETS IN TAIL CHANNEL
 (2) PAN STYLE D-RINGS PER SIDE, ON
 CORNER
 66" WIDE BUMPER AT REAR
 70 & 80: FRAME REINFORCEMENT
 FOR FLIP AXLE
 90: FRAME REINFORCEMENT FOR
 2 AXLE BOOSTER

REAR BRIDGE OPTIONS

1 PAIR CLEARANCE LIGHTS
 PULL OUT LIGHTS
 4" AMBER STROBE TAIL LIGHT
 ADDITIONAL TAIL LIGHT
 BATTERY BACK UP
 (1) 4-WAY PLUG
 1 3/8" APITONG DECKING - RAISED
 DOCK BUMPERS

MAIN DECK

29' - 50' 4" LONG
 PATENTED EXTEND-A-TRAC
 EXTENSION STOPS 24" ON CENTER
 T-1 FLANGE, 80K WEB
 (4) FAB I-BEAMS
 20" LOADED DECK HEIGHT
 6" GROUND CLEARANCE
 FORMED CROSS MEMBERS
 ON 12" CENTERS
 (8) BENT D-RINGS PER SIDE
 1 1/8" APITONG DECKING FLUSH,
 CENTER COVERED
 RAMP TAPERS TO 4"
 (14) 1/2" CHAIN DROPS PER SIDE
 REMOVABLE SWING OUT OUTRIGGER
 BRACKETS ON 24" CENTERS
 54" AXLE SPACING: 30" LONG MINI-DECK
 60" AXLE SPACING: 24" LONG MINI-DECK

MAIN DECK OPTIONS

STORAGE COMPARTMENT IN REAR
 OF MAIN DECK (MINI DECK)
 REMOVABLE SWING OUT OUTRIGGERS
 OAK OUTRIGGER PLANKS, 2" X 10"
 1 3/8" APITONG DECKING - RAISED
 ADDITIONAL CLEARANCE LIGHTS
 4-WAY PLUGS

AXLES

(2) 25,000 LB NOMINAL
 HUB PILOT, OUTBOARD DRUMS
 4S2M ABS
 16 1/2" X 7" BRAKES
 (2) PAIR SPRING BRAKES

AXLE OPTIONS

PSI TIRE INFLATION SYSTEM
 HUBOMETER
 TP AXLES (SAME INNER & OUTER BEARINGS)
 LIMIT STRAPS
 DUST SHIELDS
 CAM COVERS

WHEELS & TIRES

8.25 X 22.5 STEEL RIMS
 255 / 70R / 22.5 TIRES

WHEEL AND TIRE OPTIONS

ALUMINUM MILL WHEELS
 ALUMINUM POLISHED WHEELS
 ALUMINUM DURABRIGHT WHEELS
 MICHELIN 255/70R/22.5 TIRES
 GOODYEAR 275/70R/22.5 TIRE
 (41" REAR BRIDGE)

SUSPENSION

25,000 LB AIR RIDE
 RAISE AND LOWER VALVE
 MANUAL RIDE HEIGHT CONTROL

SUSPENSION OPTIONS

LIQUID FILLED AIR GAUGE
 AIR WEIGH DIGITAL SCALE

LIGHTING

D.O.T. APPROVED 12V SEALED
 GROTE HARNESS
 RUBBER MOUNTED LED LIGHTS
 2 TAIL LIGHT PACKAGE WITH
 ALUMINUM COVER

PAINT

1 YEAR WARRANTY
 BLACK, IH RED, OR NEW CAT YELLOW
 AIR & ELECTRIC DONE AFTER PAINT

PAINT OPTIONS

NON-STANDARD PAINT COLORS
 NON-STANDARD METALLIC PAINT

AVAILABLE MODELS

XL 70 MDE
 XL 80 MDE
 XL 90 MDE

OTHER CUSTOM CAPACITIES AND
 OPTIONS ALSO AVAILABLE,
 ASK YOUR SALES REP FOR DETAILS

STANDARD FEATURES VARY WITH CUSTOM MDEs